




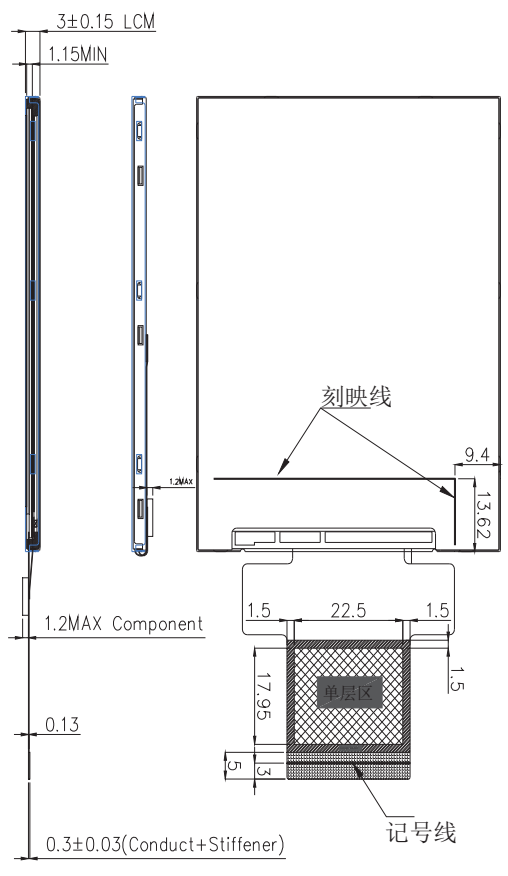

truevision
technology

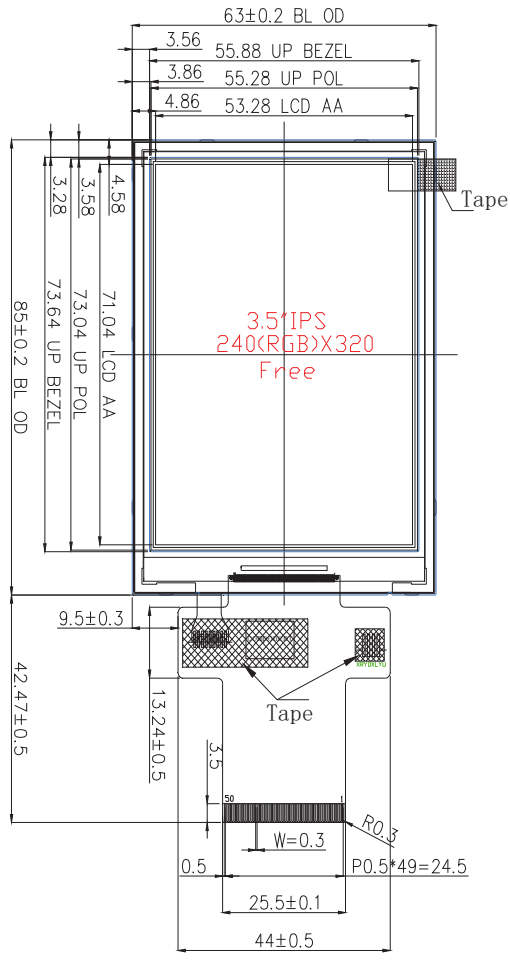

NO.	Pin Name
1	GND
2	YU
3	XL
4	YD
5	XR
6	BS0
7	BS1
8	BS2
9	NRESET
10	VSYNC
11	HSYNC
12	CLK
13	DE
14	DB17/R5, MSb
15	DB16/R4
16	DB15/R3
17	DB14/R2
18	DB13/R1
19	DB12/R0,LSb
20	DB11/G5,MSb
21	DB10/G4
22	DB09/G3
23	DB08/G2
24	DB07/G1
25	DB06/G0,LSb
26	DB05/B5,MSb
27	DB04/B4
28	DB03/B3
29	DB02/B2
30	DB01/B1
31	DB0/B0,LSb
32	SDO
33	SDI
34	NRD
35	NWR
36	DNC_SCL
37	NCS
38	VCI
39	VCI
40	IOVCC
41	LEDK1
42	LEDK2
43	LEDK3
44	LEDK4
45	LEDK5
46	LEDK6
47	LEDK7
48	LEDK8
49	LEDA
50	GND

Feature	Specification
Display Type	TFT - Color
Display Mode	Transmissive
Touchscreen	Non-Touch
Diagonal Screen Size	3.5" (88.90mm)
Viewing Area	53.28mm (W) x 71.04mm (H)
Backlight	LED - White
Dot Pixels (Resolution)	240 x 320
Interface	Multi
Controller Type	HX8347A
Graphics Color	Red, Green, Blue (RGB)
Brightness	500 cd/m ²
Orientation	Portrait
Viewing Angles	IPS all-round viewing angles
Logic Voltage	2.8V
Module Size	63mm x 85mm x 3mm
Operating Temperature	-30°C to +85°C
Display Pinout	50-way flat flexi, 0.5mm pitch
Part Status	Active
Packaging	Tray

P/N: TFTLCM0350IH

sales02@tvtdisplay.com
http://tvtdisplay.com
+86 755 2331 5813

Truevision Technology Dongguan China

All rights strictly reserved.
Reproduction or issue to third parties in any form whatever
is not permitted without written authority from the proprietor.